

※主 要 技 術 參 數

機　　型		SK-8130L	SK-8140L SK-8140LF	SK-8150L	SK-8130LF	SK-8230L	SK-8240L SK-8240LF	SK-8250L	SK-8230LF
輸入電壓		AC 110V~120V　50Hz/60Hz				AC 220~240V　50Hz/60Hz			
額定功率		68W							
扭 力	(kgf.cm)	5-22	10-30	15-45	5-17	5-22	10-30	15-45	5-17
	(Lbf.in)	4.34-19.12	8.67-26.02	13-39.02	4.34-14.78	4.34-19.12	8.67-26.02	13-39.02	4.34-14.78
	(N.m)	0.49-2.16	0.98-2.94	1.47-4.41	0.49-1.67	0.49-2.16	0.98-2.94	1.47-4.41	0.49-1.67
扭力精度 (%)		±3%							
扭 力 調 整		無段式							
空轉速 n0: (r/min)		1000	700 1000	500	1900	1000	700 1000	500	1900
無負荷電流(A)		0.4A				0.3A			
適用螺絲直徑(mm)	機械牙	2.6~4.0	3.0~5.0	4.0~6.0	2.3~3.5	2.6~4.0	3.0~5.0	4.0~6.0	2.3~3.5
	自攻牙	2.0~3.5	2.6~4.0	3.0~5.0	2.0~3.0	2.0~3.5	2.6~4.0	3.0~5.0	2.0~3.0
重　量　(g)		700							
長　度 (mm)		269							
適用扭力固定環		KC-1							
適用起子架		KH-3、(KC & KH-1)							
適用起子頭		 HEX 5mm,				 HEX 6.35mm			

* 1N.m=10.2Kgf.cm　1N.m=8.85Lbf.in

※標　准　配　件

1． 起子頭（ＢＩＴ）型號：　NO. 00#　適用於直徑 1.3~1.8mm 螺絲

NO. 0#　適用於直徑 1.8~2.0mm 螺絲

NO. 1#　適用於直徑 2.0~2.6mm 螺絲

NO. 2#　適用於直徑 3.0~4.0mm 螺絲

SK-8130L；SK-8230L　配附 BIT　1# & 2#　各 1 支


SK-8140L；SK-8240L　配附 BIT　2#　2 支

SK-8150L ；SK-8250L　配附 BIT　2#　2 支

SK-8130LF；SK-8230LF　配附 BIT　1# & 2#　各 1 支

SK-8140LF；SK-8240LF　配附 BIT　2#　2 支

2． 起子吊簧(30cm)一條。

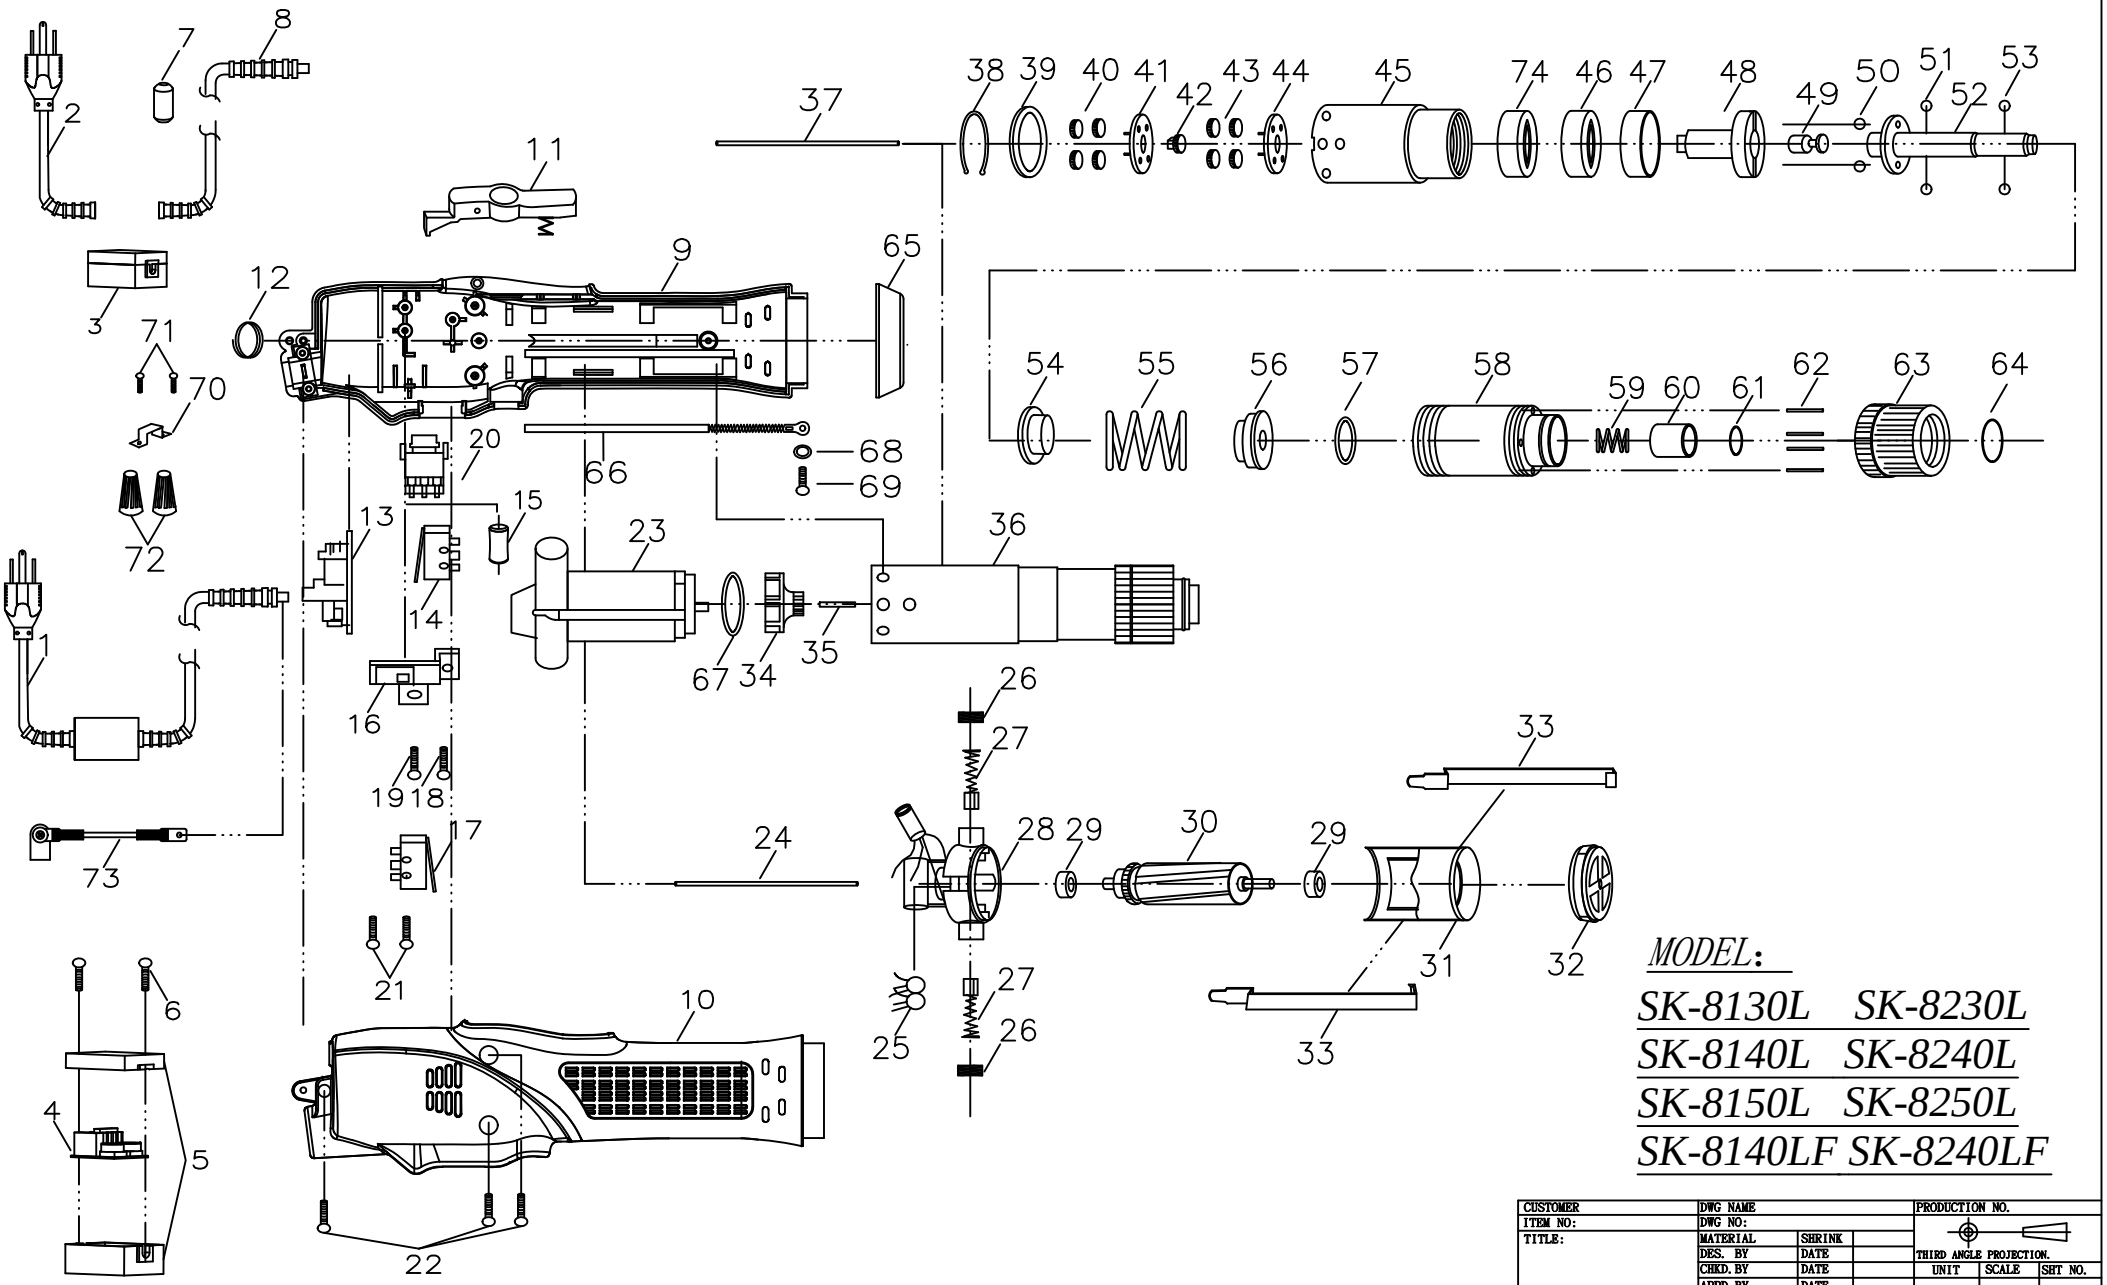

MODEL:

SK-8130L SK-8230L


SK-8140L SK-8240L

SK-8150L SK-8250L

SK-8140LF SK-8240LF

CUSTOMER	DWG NAME			PRODUCTION NO.		
ITEM NO:	DWG NO:					
TITLE:	MATERIAL	SHRINK		THIRD ANGLE PROJECTION.		
	DES. BY	DATE				
	CHKD. BY	DATE		UNIT	SCALE	SHT NO.
	APPD. BY	DATE				


NO	PARTS NO	PARTS NAME-E	PARTS NAME-C	O'ty	NO	PARTS NO	PARTS NAME-E	PARTS NAME-C	O'ty
1	AC30001-1	Cord Assy-AMERICA Plug	電源線整組 美規	1		GZ91072-3A	CLUTCH ASSEMBLY FOR 8140LA	離合器整組 8140LA	1
	AF30001-1	Cord Assy-EUROPE Plug	電源線整組 歐規	1		GZ91072-3B	CLUTCH ASSEMBLY FOR 8140LB	離合器整組 8140LB	1
	AG30001-1	Cord Assy-BRITISH Plug	電源線整組 英規	1		GZ92071-3A	CLUTCH ASSEMBLY FOR 8150LA	離合器整組 8150LA	1
	AJ30001-1	Cord Assy-INDIA Plug	電源線整組 印規	1		GZ92071-3B	CLUTCH ASSEMBLY FOR 8150LB	離合器整組 8150LB	1
	AD30001-1Y	Cord Assy-AUSTRALIA Plug	電源線整組 澳規	1		GZ91072-3AF	CLUTCH ASSEMBLY FOR 8140LFA	離合器整組 8140LFA	1
	AC30001-1F	Cord Assy-AMERICA Plug FOR "8140LF,8240LF"	電源線整組 美規 8140LF,8240LF	1		GZ91072-3BF	CLUTCH ASSEMBLY FOR 8140LFB	離合器整組 8140LFB	1
	AF30001-1F	Cord Assy-EUROPE Plug FOR "8140LF,8240LF"	電源線整組 歐規 8140LF,8240LF	1	37	MJ31221	PILOT ROD	開關引導棒	1
	AG30001-1F	Cord Assy-BRITISH Plug FOR "8140LF,8240LF"	電源線整組 英規 8140LF,8240LF	1	38	GK91211	"C" RING	齒輪固定 C環	1
	AJ30001-1F	Cord Assy-INDIA Plug FOR "8140LF,8240LF"	電源線整組 印規 8140LF,8240LF	1	39	GI28444-1	IRON WASHER FOR 8130L,8140LF	齒輪固定片 8130L,8140LF	1
	AD30001-1YF	Cord Assy-AUSTRALIA Plug FOR "8140LF,8240LF"	電源線整組 澳規 8140LF,8240LF	1		GI28444	IRON WASHER FOR 8140L,8150L	齒輪固定片 8140L,8150L	1
2	AA30007-1	Cord 1FT with AMERICA Plug	1呎長電源線 美規	1	40	GH20241	IDLE GEAR FOR "8130L"	游星齒輪(8130L)	3
	AA30007-2	Cord 1FT with EUROPE Plug	1呎長電源線 歐規	1		GH91232	IDLE GEAR FOR "8140L"	游星齒輪(8140L)	3
	AA30007-5	Cord 1FT with BRITISH Plug	1呎長電源線 英規	1		GH92231	IDLE GEAR FOR "8150L"	游星齒輪(8150L)	4
	AA30007-5E	Cord 1FT with INDIA Plug	1呎長電源線 印規	1		GH21221-2	IDLE GEAR FOR "8140LF"	游星齒輪(8140LF)	4
	AA30007-1D	Cord 1FT with AUSTRALIA Plug	1呎長電源線 澳規	1	41	GG21231	GEAR SEAT FOR "8130L"	上齒盤(8130L)	1
3	EJ30002-2	EMC-BOX ASSEMBLY	EMC盒成品	1		GG20271	GEAR SEAT FOR "8140LF"	上齒盤(8140LF)	1
	EJ30002-5	EMC-BOX ASSEMBLY FOR "8140LF,8240LF"	EMC盒成品 8140LF,8240LF	1		GG91242-1	GEAR SEAT FOR "8140L"	上齒盤含中心齒(8140L)	1
4	EC30006	EMC-BOX	EMC盒	1		GG92241-1	GEAR SEAT FOR "8150L"	上齒盤含中心齒(8150L)	1
5	EG30005-3	P.C.B	PC板	1	42	G20102	CENTRAL GEAR ONLY FOR "8130L"	中心齒(8130L)	1
	EG30005	P.C.B FOR "8140LF,8240LF"	PC板 8140LF,8240LF	1		G20104	CENTRAL GEAR ONLY FOR "8140LF"	中心齒(8140LF)	1
6	CH90152-1F	SCREW	螺絲	2	43	GH20241	IDLE GEAR FOR "8130L"	游星齒輪(8130L)	3
7	ED30004	FILTER	電磁夾	1		GH91232-1	IDLE GEAR FOR "8140L"	游星齒輪(8140L)	3
8	AA30009-1T	CORD 9"	9呎長電源線	1		GH92231-1	IDLE GEAR FOR "8150L"	游星齒輪(8150L)	4
9	CB91107	HOUSING-UNDERSIDE (ORANGE-BL)	下蓋(橙-黑)	1		GH21221-2	IDLE GEAR FOR "8140LF"	游星齒輪(8140LF)	4
10	CA92107	HOUSING-UPSIDE FOR (ORANGE-BL)	上蓋(橙-黑)	1	44	GG21231	GEAR SEAT FOR "8130L"	下齒盤(8130L)	1
11	CC70012	TRIGGER	手按開關桿	1		GG91272-1	GEAR SEAT FOR "8140L"	下齒盤(8140L)	1
12	CJ20011	SUSPENSION RING	起子吊環	1		GG92271-1	GEAR SEAT FOR "8150L"	下齒盤(8150L)	1
13	EG91131-3	CONTROL BOARD FOR "110V"	PC板(110V)	1		GG20271	GEAR SEAT FOR "8140LF"	下齒盤(8140LF)	1
	EG91132-1	CONTROL BOARD FOR "220V"	PC板(220V)	1	45	GA91281	GEAR CASE FOR "8130L"	上離合器筒(8130L)	1
14	HB91061	SHUT OFF SWITCH	停止開關	1		GA91282	GEAR CASE FOR "8140L,8150L"	上離合器筒(8140L,8150L)	1
15	E31908	BRAKE RESISTOR FOR 110V	剎車電阻(阻抗)-110V	1		GA91282-1	GEAR CASE FOR "8140LF"	上離合器筒(8140LF)	1
	E31908-4	BRAKE RESISTOR FOR 220V	剎車電阻(阻抗)-220V	1	46	GN21251	MAIN BEARING	離合器主軸承	1
16	CE90101-1	SWITCH BASE	三合一開關架	1	47	GW21531	IRON RING	鐵墊圈	1
17	HB30061	START SWITCH	啟動開關	1	48	GC31321A	CAM	上離合器頭	1
18	CH90121	SCREW	螺絲	1	49	GU30370	STOP PILOT FOR "LA"	停止用酒杯(LA)	1
19	CH90131	SCREW	螺絲	1		GU30371	STOP PILOT FOR "LB"	停止用酒杯(LB)	1
20	HA91041	CHANGEOVER SWITCH FOR "8130L/8230L"	正反開關(8130L/8230L)	1	50	GP30351	STEEL BALLS	跳脫鋼珠	3
	HA91042	CHANGEOVER SWITCH FOR "8140L/8240L"	正反開關(8140L/8240L)	1	51	GP30351	STELL BALLS 4mm	酒杯鋼珠(4mm)	2
	HA92051	CHANGEOVER SWITCH FOR "8150L/8250L"	正反開關(8150L/8250L)	1	52	GD31351A-1	BIT HOLDER FOR "A"TYPE	傳動軸(A)	1
21	CH90151-1	SCREW	螺絲	2		GD31353B-1	BIT HOLDER FOR "B"TYPE	傳動軸(B)	1
22	CH20102	SCREW	螺絲	3	53	GP21291A	BIT PILOT FOR "A"TYPE	起子頭帽鋼珠(A)	2
23	MO91111	MOTOR ASSEMBLY FOR "110V"	馬達整組(110V)	1		GP21291B	BIT PILOT FOR "B"TYPE	起子頭帽鋼珠(B)	2
	MO91111-2	MOTOR ASSEMBLY FOR "8140LF"	馬達整組(8140LF)	1	54	GF31371	WARING PLATE FOR "LA"	扭力推盤(LA)	1
	MO91112	MOTOR ASSEMBLY FOR "220V"	馬達整組(220V)	1		GF31372	WARING PLATE FOR "LB"	扭力推盤(LB)	1
	MO91112-2	MOTOR ASSEMBLY FOR "8240LF"	馬達整組(8240LF)	1	55	GE91381-1	WRING SPRING FOR "8130L"	扭力彈簧(8130L)	1
24	MJ31611	PILOT ROD	開關引導棒	1		GE91382-2	WRING SPRING FOR "8140L,8140LF"	扭力彈簧(8140L,8140LF)	1
25	EB33610-2	CERAMICS CAPACITOR	陶瓷電容	2		GE92382-6	WRING SPRING FOR "8150L"	扭力彈簧(8150L)	1
26	MD91531	BRUSH CAP	碳刷蓋	2	56	GY31391	WARING SPRING BASE-LA	止推盤-LA	1
27	MC21411	CARBON FOR"110V"	碳刷(110V)	2		GY21321	WARING SPRING BASE-LB	止推盤-LB	1
	MC20161	CARBON FOR"220V"	碳刷(220V)	2	57	GK20231B	C-RING FOR LA TYPE	傳動軸固定C環 LA	1
28	ML91551	MOTOR TOP COVER FOR "110V"	碳刷座(110V)	1	58	GB21331-1	CLUTCH CASE	下離合器筒	1
	ML91552	MOTOR TOP COVER FOR "220V"	碳刷座(220V)	1	59	GO21341	BIT SPRING	起子頭帽彈簧	1
29	ME21481	ARMATURE BEARING	馬達軸承	2	60	GJ21351	BIT SLEEVE	起子頭帽	1
30	MH91591	ARMATURE FOR "110V"	電樞(110V)	1	61	GO21361	"C" RING	起子頭帽 C環	1
	MH91591PF	ARMATURE FOR "8140LF"	電樞(8140LF)	1	62	GL21371	TOROUE ADJUST PING	扭力調整棒	4
	MH91592	ARMATURE FOR "220V"	電樞(220V)	1	63	GM21381	TORQUE ADJUST RING	扭力調整環	1
	MH91592-1	ARMATURE FOR "8240LF"	電樞(8240LF)	1	64	GS21391	"C"RING	扭力環 C環	1
31	MJ91621	MOTOR YOKE ASSEMBLY	馬達鐵圈連磁鐵	1	65	CD91031-1	COUPLER (BLACK)	前鎖環(黑)	1
	MJ91621PF	MOTOR YOKE ASSEMBLY FOR "8140LF,8240LF"	馬達鐵圈連磁鐵(8140LF,8240LF)	1	66	CH30681T	GROUNDING MEANS	接地線	1
32	MB91641A	MOTOR END COVER	馬達前蓋	1	67	MF91101	INSULATING	墊圈	1
33	MA91611B	ASSEMBLING SPRING	馬達固定鐵片	2	68	CH20102-10	WASHER	墊片	1
34	MK21111	FAN FOR "8130L,8230L"	風扇(8130L,8230L)	1	69	CH20102-11	SCREW	螺絲	1
	MK91091	FAN FOR "8140L,8240L"	風扇(8140L,8240L)	1	70	CH20102-2	WIRE CLAMP	線夾	1
	MK92091	FAN FOR "8150L,8250L"	風扇(8150L,8250L)	1	71	CH20102-3	SCREW FOR WIRE CLAMP	線夾螺絲	2
	MK21112	FAN FOR "8140LF,8240LF"	風扇(8140LF,8240LF)	1	72	CH20102-7	WIRE CONNECTER	螺式接頭	2
35	MG91081	PILOT ROD	陶瓷棒	1	73	P12104	3cm RETAINING CLIP	三公分固定線	1
36	GZ91071-3A	CLUTCH ASSEMBLY FOR 8130LA	離合器整組 8130LA	1	74	GN30442	MAIN BEARING	離合器主軸承	1
	GZ91071-3B	CLUTCH ASSEMBLY FOR 8130LB	離合器整組 8130LB	1					

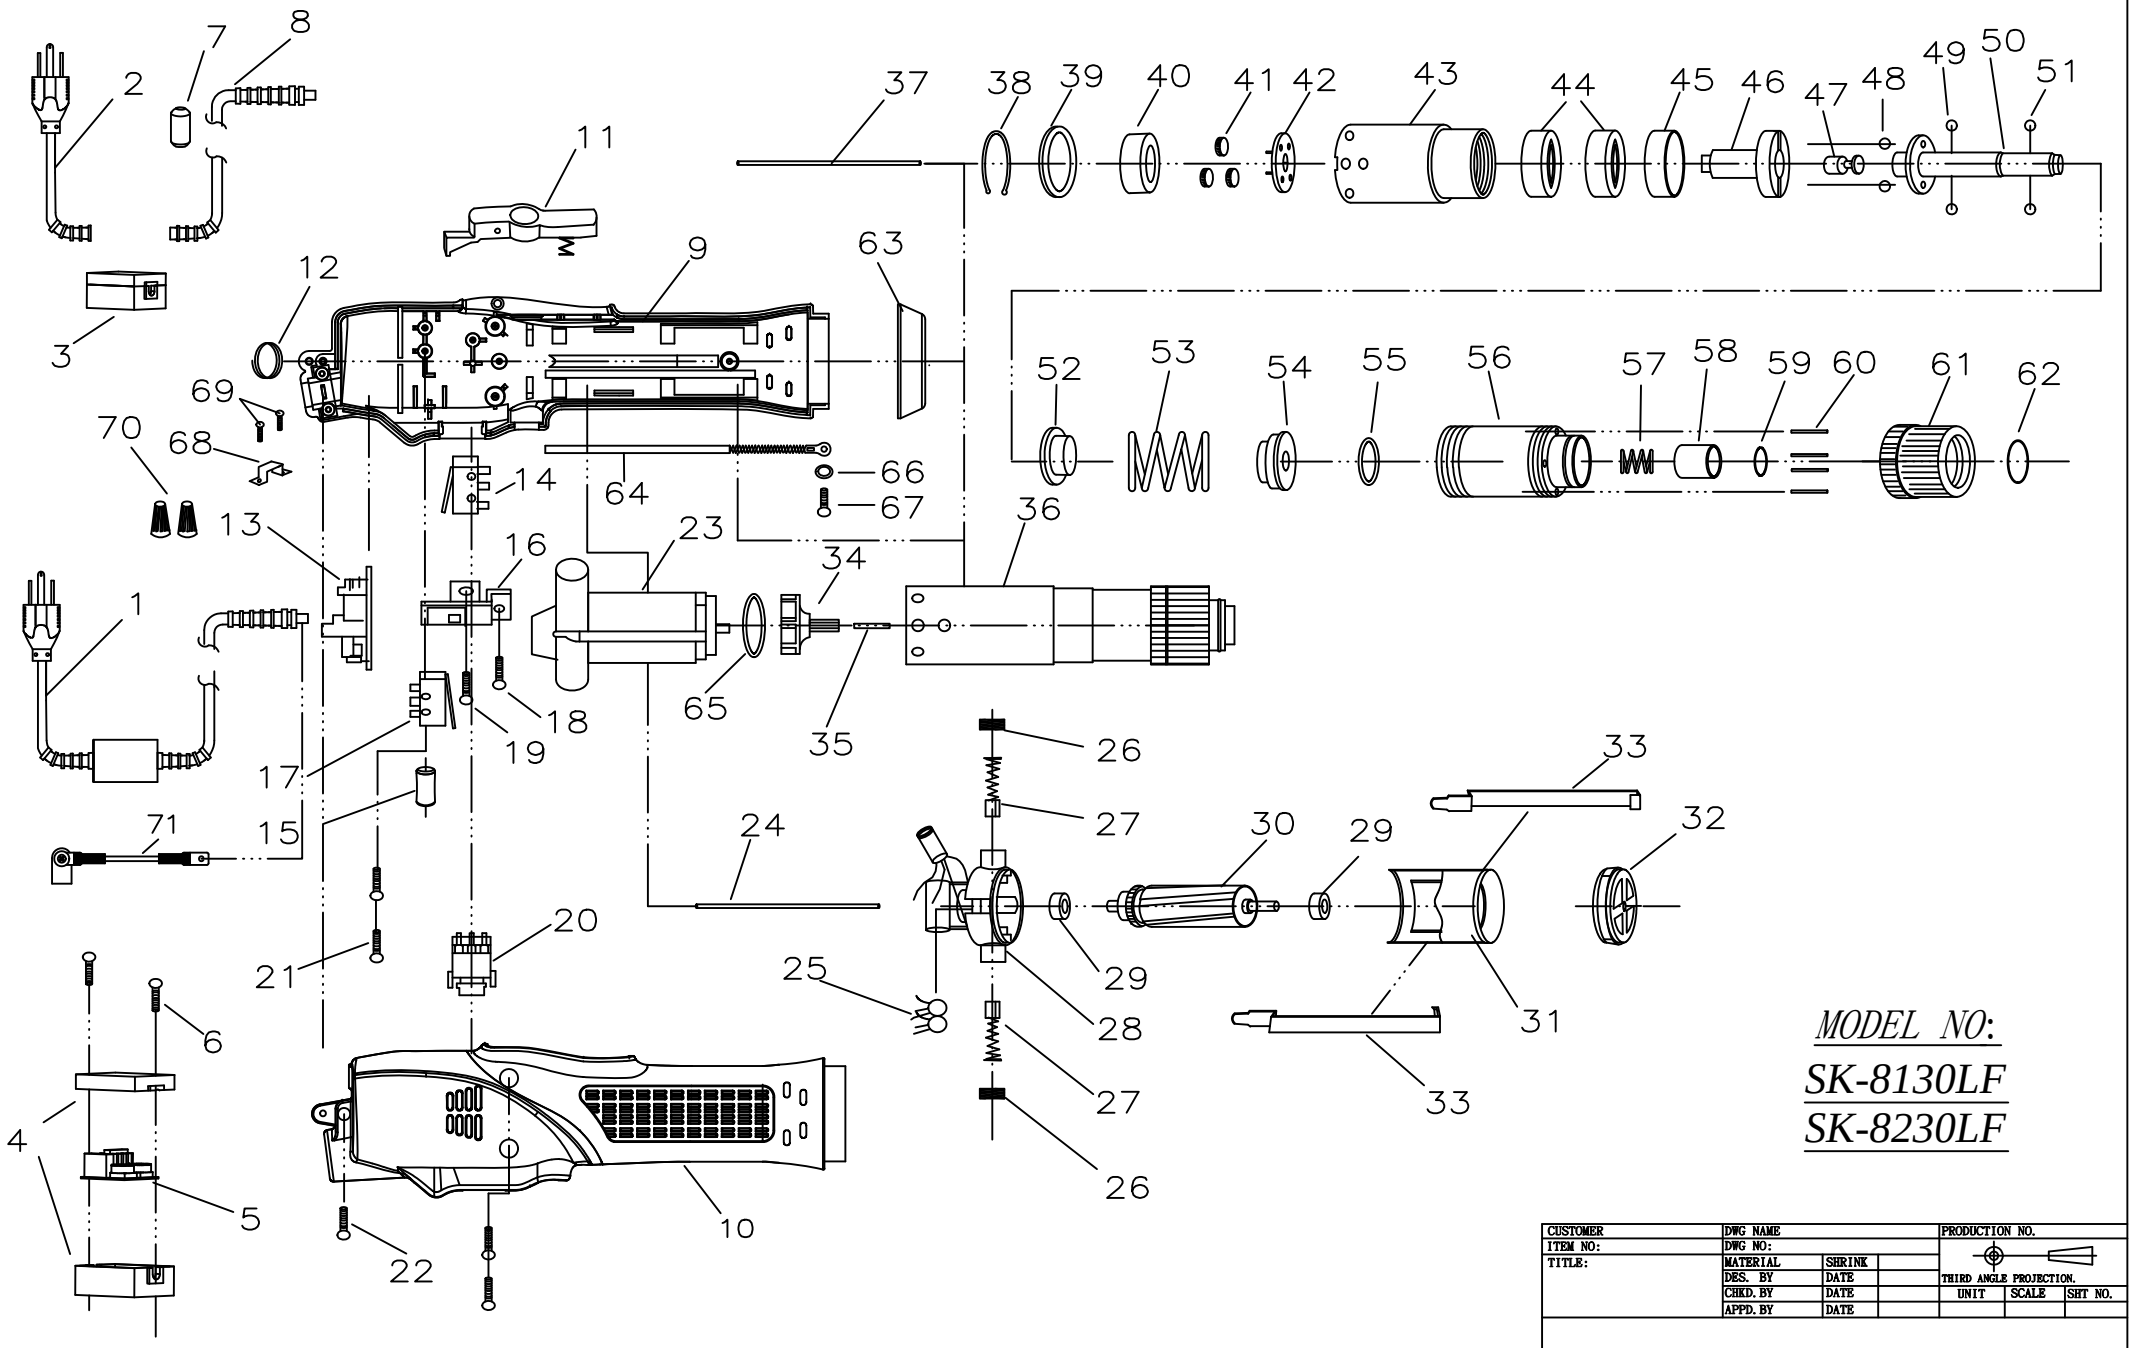
MODEL NO:
SK-8130LF
SK-8230LF
CUSTOMER
ITEM NO:
TITLE:
DWG NAME
DWG NO:
MATERIAL
SHRINK
DES. BY
DATE
CHKD. BY
DATE
APPD. BY
DATE
PRODUCTION NO.
THIRD ANGLE PROJECTION.
UNIT
SCALE
SHT NO.

NO	PARTS NO	PARTS NAME-E	PARTS NAME-C	Q'ty	NO	PARTS NO	PARTS NAME-E	PARTS NAME-C	Q'ty
1	AC30001-1F	Cord Assy-AMERICA Plug	電源線整組 美規	1	33	MA91611B	ASSEMBLING SPRING	馬達固定鐵片	2
	AF30001-1F	Cord Assy-EUROPE Plug	電源線整組 歐規	1	34	MK21111PF	FAN	風扇	1
	AG30001-1F	Cord Assy-BRITISH Plug	電源線整組 英規	1	35	MG30081-1	PILOT ROD	陶瓷棒	1
	AJ30001-1F	Cord Assy-INDIA Plug	電源線整組 印規	1	36	GZ91071-3AF	CLUTCH ASSEMBLY FOR 8130LFA	離合器整組 8130LFA	1
	AD30001-1YF	Cord Assy-AUSTRALIA Plug	電源線整組 澳規	1		GZ91071-3BF	CLUTCH ASSEMBLY FOR 8130LFB	離合器整組 8130LFB	1
2	AA30007-1	Cord 1FT with AMERICA Plug	1呎長電源線 美規	1	37	MI31221	PILOT ROD	開關引導棒	1
	AA30007-2	Cord 1FT with EUROPE Plug	1呎長電源線 歐規	1	38	GK91211	"C" RING	齒輪固定C環	1
	AA30007-5	Cord 1FT with BRITISH Plug	1呎長電源線 英規	1	39	GI28444-1	IRON WASHER	齒輪固定片	1
	AA30007-5E	Cord 1FT with INDIA Plug	1呎長電源線 印規	1	40	G21301	WASHER	齒輪墊圈	1
	AA30007-1D	Cord 1FT with AUSTRALIA Plug	1呎長電源線 澳規	1	41	GH21221-1	IDLE GEAR	游星齒輪	3
3	EJ30002-5	EMC-BOX ASSEMBLY	EMC盒成品	1	42	GG21231-1	GEAR SEAT	下齒盤	1
4	EC30006	EMC-BOX	EMC盒	1	43	GA91281	GEAR CASE	上離合器筒	1
5	EG30005	P.C.B	PC板	1	44	GN21251	MAIN BEARING	離合器主軸承	2
6	CH90152-1F	SCREW	螺絲	2	45	GW21531	IRON RING	鐵墊圈	1
7	ED30004	FILTER	電磁夾	1	46	GC31321A	CAM	上離合器頭	1
8	AA30009-1T	CORD 9"	9呎長電源線	1	47	GU30370	STOP PILOT FOR "LA"	停止用酒杯(LA)	1
9	CB91107	HOUSING-UNDERSIDE (ORANGE-BL)	下蓋(橙-黑)	1		GU30371	STOP PILOT FOR "LB"	停止用酒杯(LB)	1
10	CA92107	HOUSING-UPSIDE FOR (ORANGE-BL)	上蓋(橙-黑)	1	48	GP30351	STEEL BALLS	跳脫鋼珠	3
11	CC70012	TRIGGER	手按開關桿	1	49	GP30351	STELL BALLS 4mm	酒杯鋼珠(4mm)	2
12	CJ20011	SUSPENSION RING	起子吊環	1	50	GD31351A-1	BIT HOLDER FOR "A"TYPE	傳動軸(A)	1
13	EG91131-3	CONTROL BOARD FOR "110V"	PC板(110V)	1		GD31353B-1	BIT HOLDER FOR "B"TYPE	傳動軸(B)	1
	EG91132-1	CONTROL BOARD FOR "220V"	PC板(220V)	1	51	GP21291A	BIT PILOT FOR "A"TYPE	起子頭帽鋼珠(A)	2
14	HB91061	SHUT OFF SWITCH	停止開關	1		GP21291B	BIT PILOT FOR "B"TYPE	起子頭帽鋼珠(B)	2
15	E31908	BRAKE RESISTOR FOR 110V	剎車電阻(阻抗)-110V	1	52	GF31371	WARING PLATE FOR "LA"	扭力推盤(LA)	1
	E31908-4	BRAKE RESISTOR FOR 220V	剎車電阻(阻抗)-220V	1		GF31372	WARING PLATE FOR "LB"	扭力推盤(LB)	1
16	CE90101-1	SWITCH BASE	三合一開關架	1	53	GE91381-2	WRING SPRING	扭力彈簧	1
17	HB30061	START SWITCH	啟動開關	1	54	GY31391	WARING SPRING BASE-LA	止推盤-LA	1
18	CH90121	SCREW	螺絲	1		GY21321	WARING SPRING BASE-LB	止推盤-LB	1
19	CH90131	SCREW	螺絲	1	55	GK20231B	C-RING FOR LA TYPE	傳動軸固定 C環 LA	1
20	HA91041	CHANGEOVER SWITCH	正反開關	1	56	GB21331-1	CLUTCH CASE	下離合器筒	1
21	CH90151-1	SCREW	螺絲	2	57	GO21341	BIT SPRING	起子頭帽彈簧	1
22	CH20102	SCREW	螺絲	3	58	GJ21351	BIT SLEEVE	起子頭帽	1
23	MO91111PF	MOTOR ASSEMBLY FOR "110V"	馬達整組(110V)	1	59	GQ21361	"C" RING	起子頭帽 C環	1
	MO91112PF	MOTOR ASSEMBLY FOR "220V"	馬達整組(220V)	1	60	GL21371	TORQUE ADJUST PING	扭力調整棒	4
24	MI31611	PILOT ROD	開關引導棒	1	61	GM21381	TORQUE ADJUST RING	扭力調整環	1
25	EB33610-2	CERAMICS CAPACITOR	陶瓷電容	2	62	GS21391	"C"RING	扭力環 C環	1
26	MD91531	BRUSH CAP	碳刷蓋	2	63	CD91031-1	COUPLER (BLACK)	前鎖環(黑)	1
27	MC21411	CARBON FOR "110V"	碳刷(110V)	2	64	CH30681T	GROUNDING MEANS	接地線	1
	MC20161	CARBON FOR"220V"	碳刷(220V)	2	65	MF91101	INSULATING	墊圈	1
28	ML91551	MOTOR TOP COVER FOR "110V"	碳刷座(110V)	1	66	CH20102-10	WASHER	墊片	1
	ML91552	MOTOR TOP COVER FOR "220V"	碳刷座(220V)	1	67	CH20102-11	SCREW	螺絲	1
29	ME21481	ARMATURE BEARING	馬達軸承	2	68	CH20102-2	WIRE CLAMP	線夾	1
30	MH91591	ARMATURE FOR "110V"	電樞(110V)	1	69	CH20102-3	SCREW FOR WIRE CLAMP	線夾螺絲	2
	MH91592-5	ARMATURE FOR "220V"	電樞(220V)	1	70	CH20102-7	WIRE CONNECTER	螺式接頭	2
31	MJ91621PF	MOTOR YOKE ASSEMBLY	馬達鐵圈連磁鐵	1	71	P12104	3cm RETAINING CLIP	三公分固定線	1
32	MB91641A	MOTOR END COVER	馬達前蓋	1					

※扭　力　調　整

1. 先行決定扭力大小，再用手旋轉扭力調整環至所需扭力位置。
2. 旋轉扭力調整環以增加或減少扭力輸出：順時針方向調至較高刻度，代表增加扭力。逆時針方向調至較低刻度，代表減少扭力。
3. 很多因素會影響扭力輸出。操作本電動螺絲起子時應循序漸進，先用小扭力試鎖螺絲，再漸漸增至較大扭力。
4. 扭力刻度與電動螺絲起子扭力的相互關係如扭力標示圖所示。扭力刻度的數值並非電動螺絲起子實際扭力的強弱，需對應電動螺絲起子型式以比對概略的扭力輸出值。
5. 鎖緊螺絲所需的扭力依其鉚合狀況或材質不同而有所差異，必要時可用扭力計量測及調整電動螺絲起子的扭力。
6. 電動螺絲起子經調整好扭力後，將外殼前鎖環鬆開取下，換上扭力固定環，這樣可避免人為擅意旋轉扭力調整環而讓原設定的扭力值遭到變動。
7. 在相同的扭力刻度下，反轉”R”的扭力會較大於正轉”F”的扭力，在不調整扭力調整環的情況下，有助於螺絲的拆卸；但是當螺絲緊度大於反轉扭力，離合器已經跳脫而螺絲仍無法鬆開時，仍需調整電動螺絲起子至較大扭力，方可鬆開螺絲。

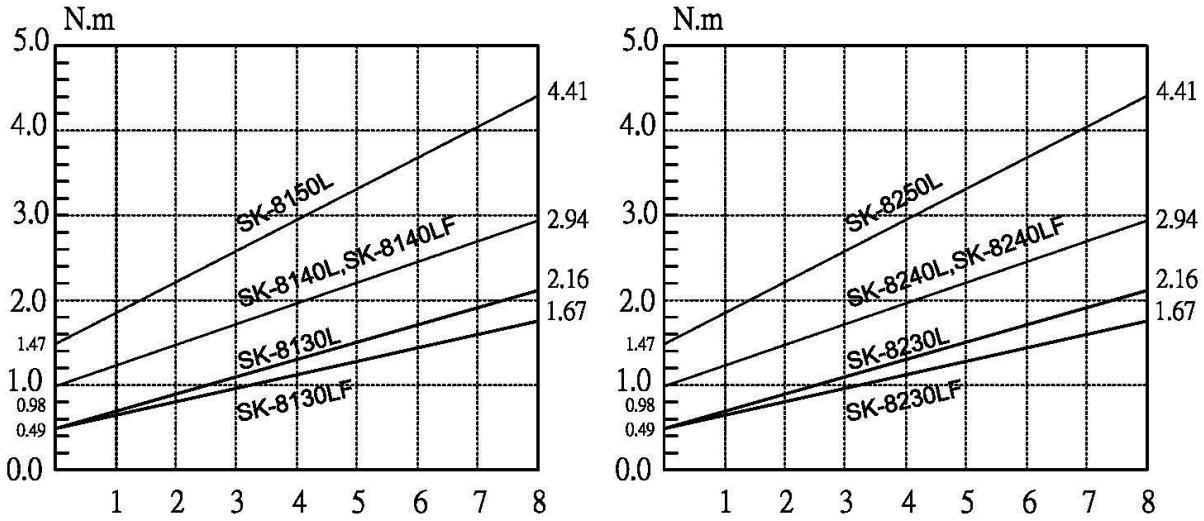

注　意

1. 進行扭力調整時，應先停止電動螺絲起子運轉。
2. 機身上的扭力刻度僅供與扭力標示圖參考，不代表電動螺絲起子的扭力輸出值。
3. 電動螺絲起子的機械磨損狀況，依使用者之使用扭力、時間或頻率而有所差異，使用扭力越大、時間越長或頻率越高則磨損越快；新品在刻度 4 使用一個月後(每日 8 時，操作頻率 12Pcs/min)約有 3~5%的扭力衰減(刻度 8 則有 5~7%的衰減)，依使用時間的增長，其衰減程度會逐漸減少並趨於穩定，使用者可定期使用扭力計量測電動螺絲起子的扭力輸出是否符合需要，適時補償衰減的扭力。

RoHS

設備名稱：電動螺絲起子
Equipment name: Electric screwdriver

型號（型式）：SK-8130L,SK-8140L,SK-8150L,SK-8130LF,SK-8140LF
Type designation (Type) ：SK-8130L,SK-8140L,SK-8150L,SK-8130LF,SK-8140LF

單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr^{+6})	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
外殼 Housing	○	○	○	○	○	○
開關線路 Switch line	○	○	○	○	○	○
馬達 MOTOR ASSEMBLY	○	○	○	○	○	○
齒輪箱 Gear Housing	○	○	○	○	○	○
電源線 CORD ASSEMBLY	○	○	○	○	○	○

備考 1.〝超出 0.1 wt %〞及〝超出 0.01 wt %〞係指限用物質之百分比含量超出百分比含量基準值。
Note 1：“Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考 2.〝○〞係指該項限用物質之百分比含量未超出百分比含量基準值。
Note 2：“○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考 3.〝－〞係指該項限用物質為排除項目。
Note 3：The “–” indicates that the restricted substance corresponds to the exemption.