OPERATION MANUAL FOR RECHARGEABLE BATTERY

■ SKC-LB1820

■ SKC-LB1840

■ SKC-LB1820B

■ SKC-LB1820C

Note

Battery limited warranty obtains for 6-month by manufacturer. For better durability, fully charge battery at least once while battery without using for 3 months long. All rechargeable batteries are consumable components that become less effective as they chemically age.

Caution

For the safety reason, please only use the same type of charger manufactured by Kilews to recharge this type of batteries. Please read manual carefully and follow all the instructions, also pay attention to all the warring.

KILEWS INDUSTRIAL CO., LTD.

http://www.kilews.com

Y2F156-E-003

Important Notification

1. Please read all instructions carefully before operate the rechargeable screwdriver and the charge station. Failure to follow all instructions listed below may result in electric shock fire and/or serious injure.
2. Please fully recharge the battery before assembles with screwdriver.
3. Before insert the battery, place the Forward/Backward switch to the middle, in case of accident.
4. Do not place charger on high shelf. The charger should be placed on the leveled, firmed spot that prevent children from reaching.
5. Please do not place rechargeable batteries in the poorly ventilated place, nor expose the charger in the dust or metal crumb.
6. Do not expose rechargeable batteries directly under sun, high temperature, high humidity, and highly explosive gas.
7. Do not place rechargeable batteries on high shelf. The charger should place on the leveled, firmed spot that prevent children from reaching.
8. Please read all instructions carefully before operate the charger. Failure to follow all instructions listed below may result in electric shock fire and/or serious injure.
9. It is forbidden to use different brand of battery other than KILEWS' on the charger. To disassemble and modify the charge are also not allowed. The use of other than genuine KILEWS charger may result in decreased tool performance and increased maintenance, and may invalidate all warranties.
10. Abusing the rechargeable battery may cause the battery damage. If the liquid leak out due to the damage of the battery, please do not touch with your own buddy. If so, please use tab water to rinse off. If the liquid get into your eye, please contact a doctor immediately.
11. Rechargeable batteries have 6 months warranty. Depends on the frequency of use, the battery capacity gradually shortened (charging time). when the battery unused more than six months, please send by to KILEWS or local dealer to re-activate the battery, otherwise it will shorten the battery life time and will cause the battery to deactivated and not able to recharge.
12. The best working temperature to recharge the battery is from 0 ℃ to 30℃. When the battery temperature is below 0℃, the battery-liquid inside the rechargeable battery will be frozen, therefore the battery is not able to recharge.
13. Under normal usage, KILEWS battery guaranties 600 recharge times. Battery remains 70% capacity when battery recharge after 1000 times. Each recharge and discharge, battery capacity decreases.

Icon explanation


Read Manual


Caution


Recycle


No humidity


No fire


No disassemble


No disposa




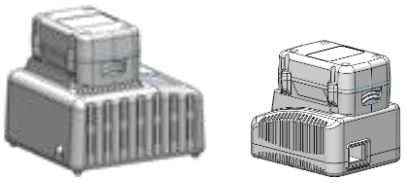
Safety Certifications

CE certification

RECOGNIZED COMPONENT
Intertek
4006754
CONFORMS TO
UL STD. 2054

CETLUS certification

Products introduction and specification

Product type	SKC-LB1820	SKC-LB1840	SKC-LB1820B	SKC-LB1820C
Appearance				
Operation steps	 Take off the cover case.	 Assemble with coreless Screwdriver.	 Connect to the charger stand.	
Battery capacity	1500 mAh / 1950mAh	3000 mAh / 3900mAh	2000mAh	
Color	Black			
Battery type	Lithium-ion rechargeable battery			
Battery weight(kg)	0.43/0.42	0.72/0.7	0.43	
Dimensions(mm)	L119 × W80 × H39	L119 × W80 × H58	L92 × W75 × H63	
Nominal voltage	18V			
Full charged voltage	21V			
Protection mechanisms	1.High temperature protection. 2.Overcurrent protection. 3.Over recharge Protection. 4.Over discharge Protection. 5.When the battery is charging, the battery temperature lower 0℃ or higher 50℃. The charging process will be stopped.			

Contents

Rechargeable battery	1 PCS
Operation manual	1 PCS
Warranty certification	1 PCS

Caution ⚠
SAVE THESE INSTRUCTIONS
DO NOT DESTROY